

WIRING DIAGRAM FOR ADAMS RITE EUROPE LTD 1225 DC POWER SUPPLY



Specification

12/24V DC
@ 12V - 2 Amp
@ 24V - 1 Amp

Fitting Instructions

1. The unit should be mounted where required.
2. Knock through 20 mm diameter holes (X) as required to feed cable.
3. Connect the 230V mains cable to the mains terminal block. Please ensure there is a mains earth connected at all times.
4. For 12V DC ensure both switches are pushed to the left.
5. For 24V DC ensure both switches are pushed to the right and the two battery terminals linked as shown.
6. Wire the +ve and -ve supply to the system to the pwr terminals as shown.
7. For battery backup connect to battery terminals.
8. The anti-tamper switch is wired in the normally open position and is triggered by the lid to the power supply being opened.

Please note these instructions should be removed from the box and stored in a safe place.

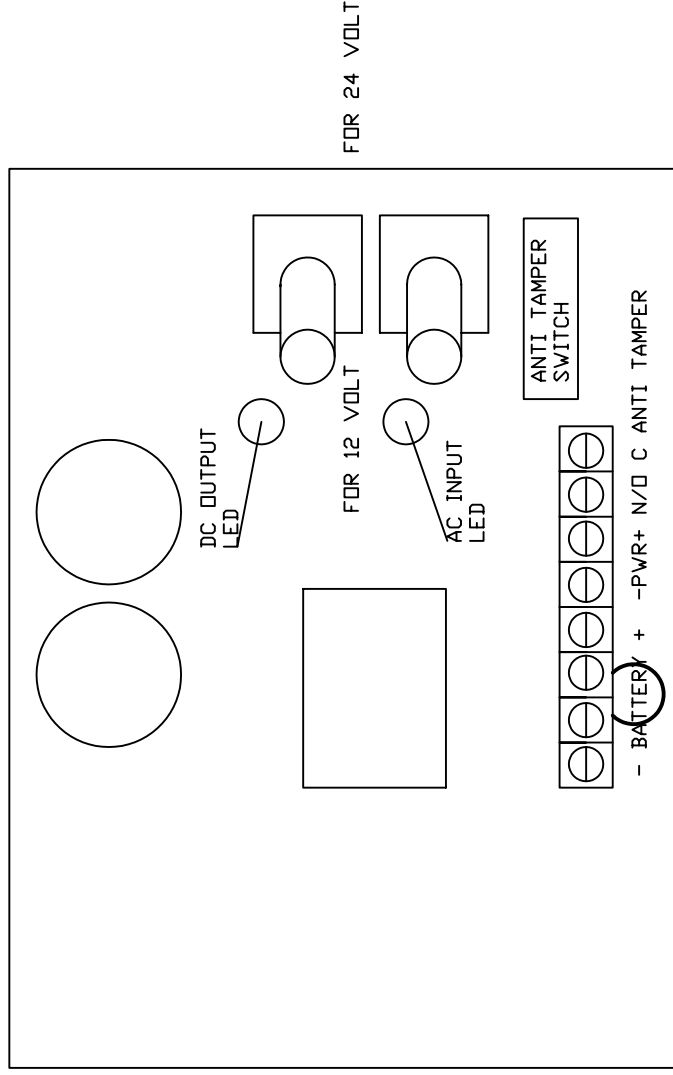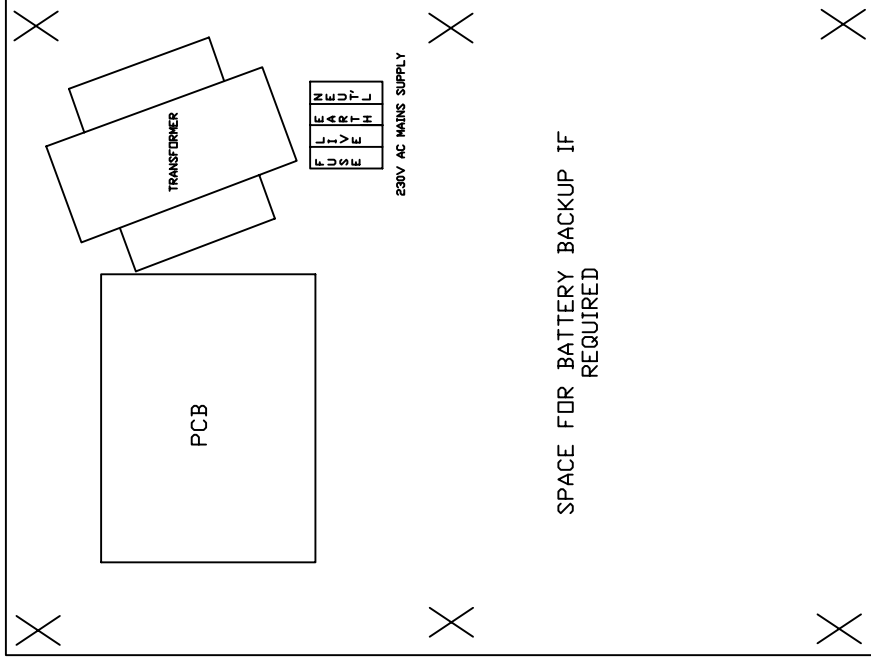

ADAMS RITE EUROPE LIMITED
MORETON INDUSTRIAL ESTATE, LONDON ROAD,
SWANLEY,
KENT. BR8 8TZ +44(0)1322 668024

1225 DC POWER
SUPPLY