

4550

Deadlock Lever

A S




Function


Provides easy unlocking of Adams Rite MS® deadlocks by approximately 1.4kg (3lb) of downward pressure. Lever is sprung-loaded to horizontal and relocks by upward motion from horizontal. Lock status is shown by indicator.

Specifications

- Housing:** 182mm x 34mm x 26mm. Aluminium casting.
- Lever:** 96.5mm x 27mm. Aluminium.
Projection from face of door: 57.4mm.
Available in Aluminium, Bronze and Black finishes.
- Operation:** Turn lever downward 90° to unlock.
When released, lever returns to horizontal.
Turn lever upward 90° to relock.
Key operation from outside is not affected.
- Indicator:** Shows 'LOCKED' in red or 'OPEN' in black on a white background. Indicator is driven by lock bolt itself.
- Stop Clearance:** Lever housing projects 17.5mm (1 1/16") forward of cylinder backset centreline. Depending on height of door stop and width of door/jamb gap, it may be necessary to modify the stop to clear the housing.
- Compatibility:** Suits MS®1850S and MS®1850SNSI Deadlocks (except 22.2mm (7/8") backset models), MS®1860 Deadlock and 1870Flushbolt.
- Note:** The 4550 is not suitable for use with the MS®+1890 Latch/Deadlock.

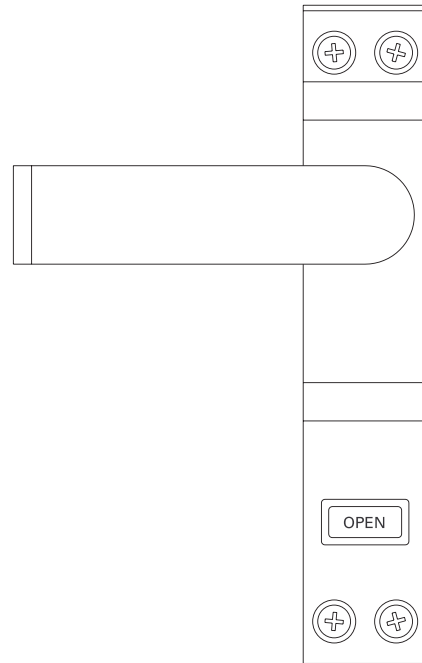

Dimensions

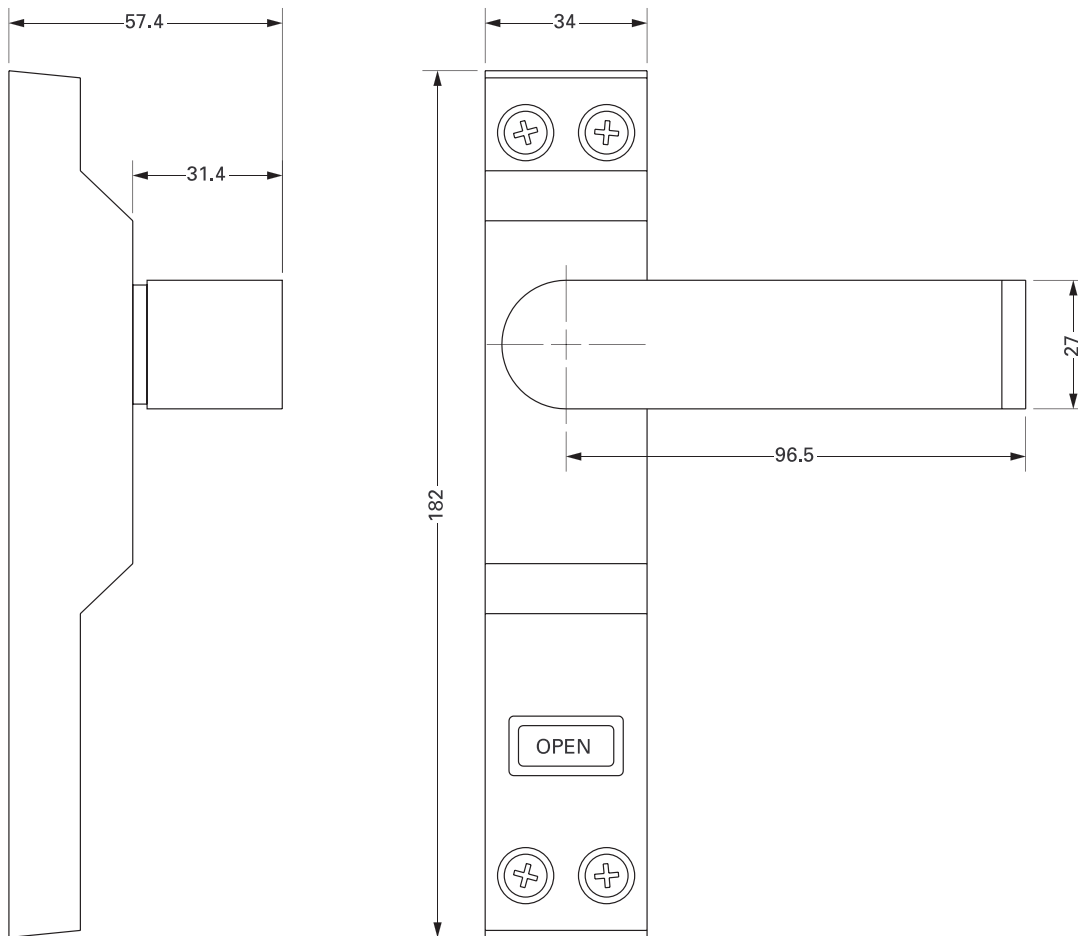

Ordering Codes

4550-07-130	Deadlock lever handle, LHR or RH, aluminium finish
4550-08-130	Deadlock lever handle, RHR or LH, aluminium finish
4550-07-121	Deadlock lever handle, LHR or RH, bronze finish
4550-08-121	Deadlock lever handle, RHR or LH, bronze finish
4550-07-119	Deadlock lever handle, LHR or RH, black finish
4550-08-119	Deadlock lever handle, RHR or LH, black finish

Note: Above codes are for handle only; order deadlocks separately.

Related Hardware

MS®1850S Maximum Security Deadlock (p4) ~ MS®1850SNSI Maximum Security Deadlock (p6)

1870 Cylinder-Operated Flushbolt (p46)