

MS[®]1900

Multipoint Locking System

The Adams Rite MS[®] 1900 Multipoint Locking System is designed to provide maximum security for sliding patio doors.




Key Benefits

- Suitable for use on aluminium and steel doors.
- The anti-lift hookbolt houses an alumina-ceramic core for protection against hacksaw attack.
- 22mm hookbolt throw.
- The MS[®] 1900 retains the same uncomplicated over centre pivot mechanism and all the security features associated with Adams Rite MS[®] Deadlocks.
- Steel case with corrosion resistant plating.
- Available in single or 2 point locking.

Related Hardware

Europrofile Cylinders and Escutcheons ~ Europrofile Thumbturns

Dimensions

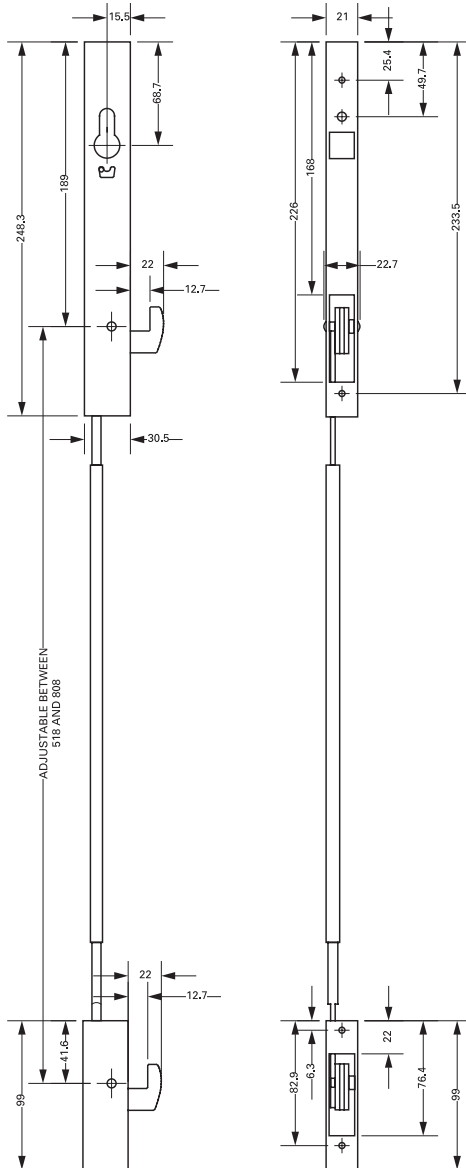

Specifications


Overall Case Size: 248.3mm x 21mm x 30.5mm (upper lock case)
99mm x 21mm x 30.5mm (lower lock case).

Case: Steel with corrosion-resistant plating.

Hookbolt Throw: 22mm.

Operation: 360° turn of key throws or retracts hookbolts.
Key only removable when bolt is positively locked or unlocked.

Door Gap: Maximum 3mm.

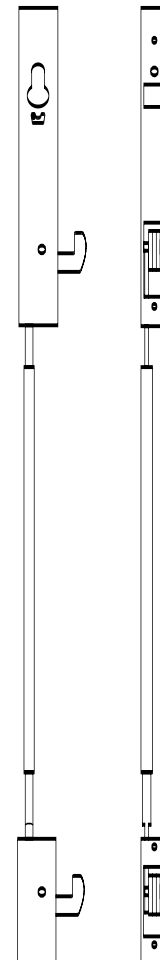

Ordering Codes

Lock Bodies

1900-01-01-CM-UK

MS®1900 Single Point Centrally Mounted without Header Slide

1900-01-02-CM

MS®1900 Two Point Centrally Mounted without Header Slide

Note: Cylinders and thumbturns not supplied as standard; order separately.

Due to the wide variety of jamb details used, a strike plate is not provided.