

MS[®] 1900

Multipoint Locking System




ASSA ABLOY

Function


Designed primarily to provide **Maximum Security for sliding patio doors**, the MS[®]1900 retains the same uncomplicated over centre pivot mechanism and all the security features associated with Adams Rite MS[®] Deadlocks. The anti-lift hookbolt houses an alumina-ceramic core for protection against hacksaw attack. Locking is achieved by two 3-ply laminated steel hookbolts swinging into the jamb section behind striking plates.

Specifications

Overall Case Size:	248.3mm x 21mm x 30.5mm (upper lock case) 99mm x 21mm x 30.5mm (lower lock case).
Case:	Steel with corrosion-resistant plating.
Hookbolt Throw:	22mm.
Operation:	360° turn of key throws or retracts hookbolts. Key only removable when bolt is positively locked or unlocked.
Door Gap:	Maximum 3mm.

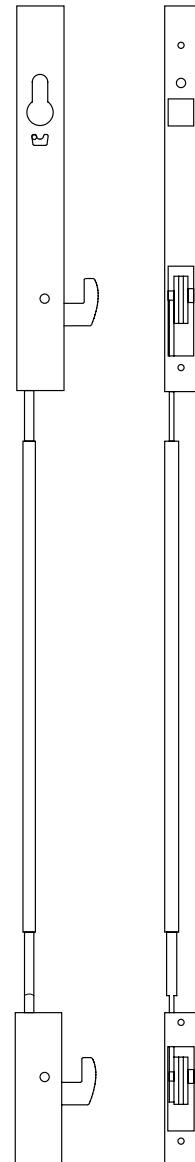

Dimensions

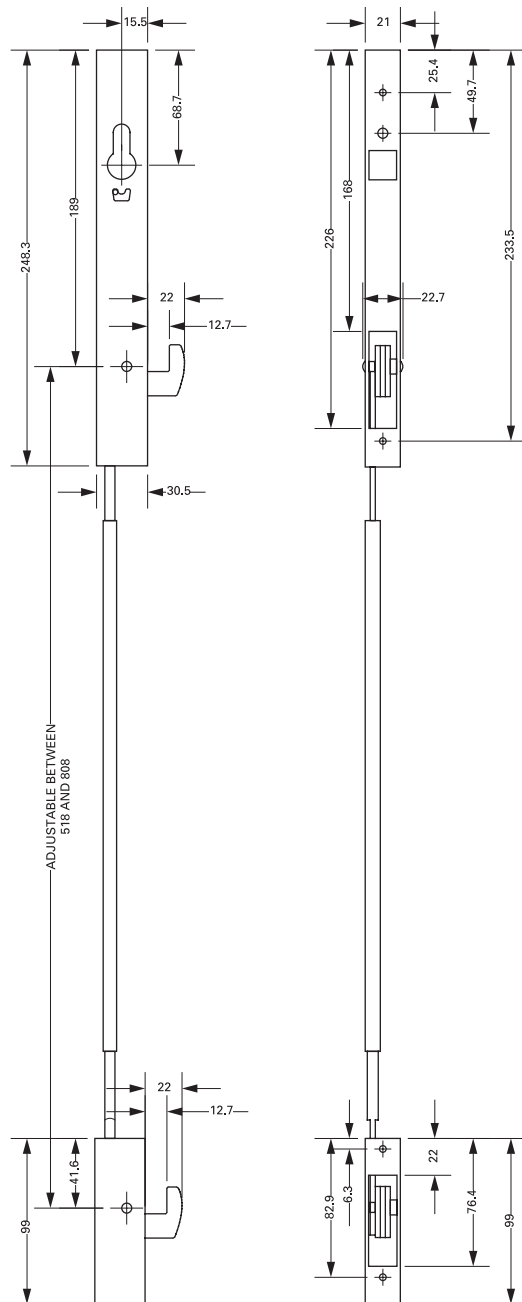

Ordering Codes

Lock Bodies

1900-01-01-CM-UK MS[®]1900 Single Point Centrally Mounted without Header Slide
 1900-01-02-CM MS[®]1900 Two Point Centrally Mounted without Header Slide

Note: Cylinders and thumbturns not supplied as standard; order separately.
 Due to the wide variety of jamb details used, a strike plate is not provided.

Related Hardware

Europrofile Cylinders and Escutcheons (p42) ~ Europrofile Thumbturns (p44)